

## P. ENT COOPERATION TREA

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE  
 in its capacity as elected Office

<b>Date of mailing (day/month/year)</b> 01 March 2001 (01.03.01)	
<b>International application No.</b> PCT/NZ00/00134	<b>Applicant's or agent's file reference</b> P427959 AHB
<b>International filing date (day/month/year)</b> 21 July 2000 (21.07.00)	<b>Priority date (day/month/year)</b> 21 July 1999 (21.07.99)
<b>Applicant</b> ZAHER, Mouafak, Arif	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
 23 January 2001 (23.01.01)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was  
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b> F. Baechler Telephone No.: (41-22) 338.83.38
--	--

## PCT INTERNATIONAL COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

CALHOUN, Douglas, C.  
A J Park  
6th floor, Huddart Parker Building  
1 Post Office Square  
P.O. Box 949  
Wellington 6015  
NOUVELLE-ZÉLANDE

Date of mailing (day/month/year) 01 March 2001 (01.03.01)	<b>IMPORTANT NOTIFICATION</b>
Applicant's or agent's file reference P427959 AHB	
International application No. PCT/NZ00/00134	International filing date (day/month/year) 21 July 2000 (21.07.00)

## 1. The following indications appeared on record concerning:

☐ the applicant      ☐ the inventor      ☒ the agent      ☐ the common representative

## Name and Address

PARK, A., J.  
Huddart Parker Building  
1 Post Office Square  
Wellington  
New Zealand

## State of Nationality

## State of Residence

## Telephone No.

64 9 356 6996

## Facsimile No.

64 9 356 6990

## Teleprinter No.

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☒ the person      ☒ the name      ☒ the address      ☐ the nationality      ☐ the residence

## Name and Address

CALHOUN, Douglas, C.  
A J Park  
6th floor, Huddart Parker Building  
1 Post Office Square  
P.O. Box 949  
Wellington 6015  
New Zealand

## State of Nationality

## State of Residence

## Telephone No.

64 9 356 6996

## Facsimile No.

64 9 356 6990

## Teleprinter No.

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

☒ the receiving Office      ☐ the designated Offices concerned  
☐ the International Searching Authority      ☒ the elected Offices concerned  
☒ the International Preliminary Examining Authority      ☐ other:

<p>The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No.: (41-22) 740.14.35</p>	<p>Authorized officer F. Baechler</p> <p>Telephone No.: (41-22) 338.83.38</p>
--	---

## INTERNATIONAL SEARCH REPORT

 International application No.  
**PCT/NZ00/00134**
**A. CLASSIFICATION OF SUBJECT MATTER**Int. Cl. <sup>7</sup>: F04D 7/04, 29/22

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**
 Minimum documentation searched (classification system followed by classification symbols)  
 IPC : F04D 7/04, 29/22

 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
 AU : IPC AS ABOVE

 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 DWPI, USPTO
**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 702156A1 (INSTITUT FRANCAIS DU PETROLE) 20 March 1996 See the whole document	1-18
Y	EP 760427A1 (GIW INDUSTRIES INC.) 5 March 1997 - See the whole document	1-18
P,Y	WO 99/46513A1 (UNITEC INSTITUTE OF TECHNOLOGY) - 16 September 1999 See the whole document	1-18

☒ Further documents are listed in the continuation of Box C ☐ See patent family annex

- \* Special categories of cited documents:
- |   |   |
|---|---|
| <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" Earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> |
|---|---|

Date of the actual completion of the international search

11 September 2000

Name and mailing address of the ISA/AU

 AUSTRALIAN PATENT OFFICE  
 PO BOX 200, WODEN ACT 2606, AUSTRALIA  
 E-mail address: pct@ipaustalia.gov.au  
 Facsimile No. (02) 6285 3929

Date of mailing of the international search report

15 SEP 2000

Authorized officer

ASANKA PERERA

Telephone No : (02) 6283 2373

14

**PATENT COOPERATION TREATY**  
**PCT**  
**INTERNATIONAL PRELIMINARY EXAMINATION REPORT**  
(PCT Article 36 and Rule 70)

REC'D 12 MAR 2001

WIPO

PCT

Applicant's or agent's file reference <b>P427959AHB</b>	<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416).
International Application No. <b>PCT/NZ00/00134</b>	International Filing Date ( <i>day/month/year</i> ) <b>21 July 2000</b>	Priority Date ( <i>day/month/year</i> ) <b>21 July 1999</b>
International Patent Classification (IPC) or national classification and IPC <b>Int. Cl.<sup>7</sup> F04D 7/04, 29/22</b>		
Applicant <b>UNITEC INSTITUTE OF TECHNOLOGY et al</b>		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 3 sheets, including this cover sheet.  
☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheet(s).

3. This report contains indications relating to the following items:

- |      |                                     |   |
|------|-------------------------------------|---|
| I    | <input checked="" type="checkbox"/> | Basis of the report   |
| II   | <input type="checkbox"/>            | Priority  |
| III  | <input type="checkbox"/>            | Non-establishment of opinion with regard to novelty, inventive step and industrial applicability  |
| IV   | <input type="checkbox"/>            | Lack of unity of invention  |
| V    | <input checked="" type="checkbox"/> | Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement |
| VI   | <input type="checkbox"/>            | Certain documents cited   |
| VII  | <input type="checkbox"/>            | Certain defects in the international application  |
| VIII | <input type="checkbox"/>            | Certain observations on the international application   |

Date of submission of the demand <b>23 January 2001</b>	Date of completion of the report <b>8 February 2001</b>
Name and mailing address of the IPEA/AU <b>AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929</b>	Authorized Officer  <b>ASANKA PERERA</b> Telephone No. (02) 6283 2373

**I. Basis of the report**

1. With regard to the **elements** of the international application:\*
- ☒ the international application as originally filed.
- ☐ the description,        pages , as originally filed,  
   pages , filed with the demand,  
   pages , received on    with the letter of
- ☐ the claims,        pages , as originally filed,  
   pages , as amended (together with any statement) under Article 19,  
   pages , filed with the demand,  
   pages , received on    with the letter of
- ☐ the drawings,        pages , as originally filed,  
   pages , filed with the demand,  
   pages , received on    with the letter of
- ☐ the sequence listing part of the description:  
   pages , as originally filed  
   pages , filed with the demand  
   pages , received on    with the letter of
2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.  
These elements were available or furnished to this Authority in the following language which is:
- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).
3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, was on the basis of the sequence listing:
- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished
4. ☐ The amendments have resulted in the cancellation of:
- ☐ the description,        pages
- ☐ the claims,        Nos.
- ☐ the drawings,        sheets/fig.
5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims 1-18	YES
	Claims	NO
Inventive step (IS)	Claims 1-18	YES
	Claims	NO
Industrial applicability (IA)	Claims 1-18	YES
	Claims	NO

**2. Citations and explanations (Rule 70.7)**

The closest prior art was found in EP 702156A1 in that it teaches fluid communication providing means between an outlet and an inlet of a pump adapted for multi-phase media.

However, this document does not suggest or fairly teach utilising a centrifugal pump with larger passageways in its impeller as defined in claim 1 or claim 13 in place of the axial flow pump (1) as described therein.

Therefore the subject matter of these claims is new and the claim meets the requirements of Article 33(2) PCT with regard to the requirement for novelty.

The claimed invention is not obvious in the light of this document nor would the claimed invention be obvious to a person skilled in the art in the light of common general knowledge.

Therefore the subject matter of these claims is not obvious and meets the requirements of Article 33(3) PCT with regard to the requirement for inventive step.

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number  
**WO 01/06128 A1**

(51) International Patent Classification<sup>7</sup>: F04D 7/04, 29/22

(21) International Application Number: PCT/NZ00/00134

(22) International Filing Date: 21 July 2000 (21.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
336855 21 July 1999 (21.07.1999) NZ

(71) Applicant (for all designated States except US): UNITEC  
INSTITUTE OF TECHNOLOGY [NZ/NZ]; Carrington  
Road, Auckland (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ZAHER, Mouafak,  
Arif [NZ/NZ]; 3A Florida Place, Glendowie, Auckland  
(NZ).

(74) Agents: PARK, A., J. et al.; Huddart Parker Building, 1  
Post Office Square, Wellington (NZ).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTI-PHASE FLOW PUMPING MEANS AND RELATED METHODS

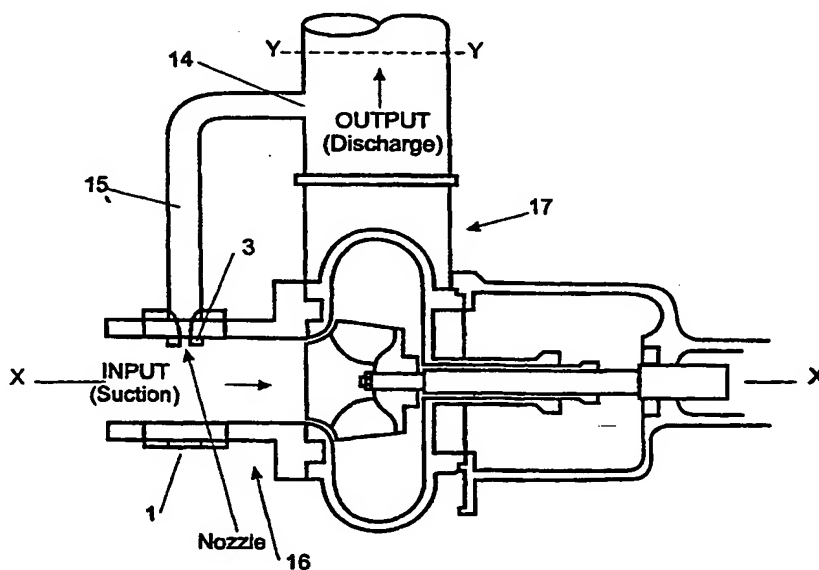

(57) Abstract: A method of pumping and related arrangement for multi-phase fluid flow wherein a centrifugal pump (1) is used for the suction and delivery of the multi-phase fluid which has a fluid communication providing means to provide a communication of fluid bled from the outlet (17) at a higher pressure to be injected into the inlet conduit (16) of the centrifugal pump (1) is in operation. The centrifugal pump (1) is provided with an impeller which has a plurality of vanes configured to define there between larger passageways when compared to a conventional centrifugal pump which would operate in or near optimum conditions when pumping liquid only.

## MULTI-PHASE FLOW PUMPING MEANS AND RELATED METHODS

### INTRODUCTION

The present invention relates to improvements in or relating to multi-phase flow pumping means and related methods.

### BACKGROUND ART

Two-phase fluid pumping covers a large spectrum of pump operation and applications. In certain situations the entrained gas within a liquid medium will cause unwanted problems in the pumping process. For the off-shore oil industry there is now considerable interest in pumping liquids with a high gas content, similar as there has been for some time in the pumping systems supplying aircraft gas turbines. This interest is also found within the geothermal industry. In many oil fields, the wells contain mixtures of gas and oil in varying proportions. The handling of such fluids can create problems. The problems are strictly multi-phase, which essentially means that as the gas or steam content increases the pressure head degrades multi-phase pumps which have relatively good performance characteristics are normally of screw type. While centrifugal pumps are known to be used in the pumping of multi-phase fluids they have had limited success. It is however desirable for centrifugal pumps to be utilised in the pumping of fluids as centrifugal pumps provide the benefit of both a reduced cost when compared to many other types of pumps, simplicity of operation and construction and hence reduced maintenance, and also are normally of a smaller size.

Two-phase pumping applications utilising a centrifugal pump are known in for example the pumping of sewage. Flow separation of the different fluids prior to pumping of the pump is a common way of dealing with delivery of multi-phase flow. This is for example illustrated in the specification of US patent 5580214. The present conventional designs of centrifugal pumps are not adequate due to their inability to pump high gas volume fraction media. Work by *A Furukawa* : "*Fundamental studies on tandem blades impeller of gas liquid two phase centrifugal pump*" *Memoirs of the Faculty of Engineering Kyushu University*, 48,4,231-40 or "*On an improvement in air/water two phase flow performance of a centrifugal pump in the partial flow rate of water.*" *69th JSME Fall Annual Meeting, vol.B, paper number 1118, pp.165-7[1]* suggests using tandem or slotted blades to reduce the degradation in a limited range, of liquid to gas content.

Two-phase flow includes both a compressible and substantially incompressible fluid and the coexistence of liquid and vapour phases. The composition of the fluid



- 2 -

flow and variety of flow configurations where each phase has a different velocity in such cases makes the flow difficult to define. Particularly as the flow composition and configurations vary over time, and may reach gas volume percentages as high as 90 to 100 percent.

5 It is known that where free gas is present in a liquid being pumped the head, power and efficiency of rotodynamic pumps are known to decrease. (See figure 1). Although multi-phase products have been pumped for many years with double screw type pumps, centrifugal impeller pumps have shown serious departures from published performance curves. The head when surging begins, oscillates from high to low values  
10 once the percentage by volume of gas exceeds some point between 7% and 11% by volume of intake.

The mechanism that seems to control surge and choking in a centrifugal pump which is pumping a multi-phase fluid is the separation of the gas phase from the liquid phase and a tendency to coalescence in a large gas pocket at the blade entry throat and  
15 the sonic choking to the reduction of the speed of sound. The various pressure fluids which operate inside the impeller passages play a critical role in the two mechanisms mentioned above.

The decrease in efficiency of pumping multi-phase flow suggests that some additional loss mechanisms arise when gassy liquids are pumped. The decrease in head  
20 is greater than that which can be associated with the decrease in average density of the liquid-gas mixture. The pump performance decreases continuously as the gas volume increases until at a certain critical gas content the pump loses prime. The above trend is common to radial, mixed, and axial-flow type pumps either in single or in multistage configurations.

25 Basically the operating range appears to be limited by two phenomena:

- 1) gas locking or "choking", and
- 2) instability in the head-capacity curve which causes surge.

Also the property of two-phase flow media is the large influence of gas content on the speed of sound. Normal values of peak relative velocities around the blade  
30 leading edge are in this range. Therefore, pumps operate at transonic or supersonic local flow. It is not surprising that a blade design for incompressible single-phase flow is not very effective in multi-phase flow and produces choking for relatively high gas volume fraction. Theory shows that the dramatic variation of the speed of sound at low percentages is very much related to the large difference in density between the two  
35 phases. The sonic velocity in two-phase mixtures is also pressure dependent.

- 3 -

Accordingly it is an object of the present invention to reduce the abovementioned disadvantages and problems or to at least provide the public with a useful choice.

## **BRIEF DESCRIPTION OF THE INVENTION**

Accordingly in a first aspect the present invention consists a pumping arrangement for pumping multi-phase fluid flow said arrangement comprising:

a centrifugal pump which includes a fluid inlet and an outlet and driveable by a power providing means (e.g. an electric motor),

a fluid communication providing means to provide a communication of fluid between said outlet and said inlet of said pump, said fluid communication being such as to provide a fluid connection between said outlet and said inlet to deliver fluid of a higher pressure from said outlet to said inlet when said centrifugal pump is in operation,

wherein said centrifugal pump is provided with an impeller which has a plurality of vanes configured to define there between larger passageways when compared to a conventional centrifugal pump which would operate in or near optimum conditions when pumping liquid only.

Preferably said arrangement is for pumping a fluid of a gaseous/liquid mix.

Preferably said power providing means is an electric motor.

Preferably said fluid connection is a bleed line to bleed a portion of said fluid from the outlet of said centrifugal pump to the inlet.

Preferably said fluid connection between said outlet and inlet of said centrifugal pump is provided with at least one nozzle at the inlet for injection of bled fluid into the delivery line of said inlet of said centrifugal pump.

Preferably said at least one nozzle provides, an increase in velocity head to said bled flow prior to the point of injection by reducing the flow area of the fluid connection means

Preferably said at least one nozzle is oriented in respect of the delivery line of the inlet so as to impart a pre-rotation force onto the main inlet side fluid delivery.

Preferably said pre-rotation is in a direction co-rotatory with said impeller rotation direction.

Preferably said impeller is not of a substantially greater diameter than said conventional pump.

Preferably the impeller is one modified from a one of a centrifugal pump which would be ordinarily (to operate at or about peak efficiency) designated to pump in a

- 4 -

similar situation to the pump of the present invention but where the fluid is liquid only, said modification including the removal of vanes to provide said larger passageways, but to a limit of no less than 2 vanes remaining present.

Preferably said impeller has between 2 and 4 vanes.

5 Preferably said impeller has 4 vanes.

In a second aspect the present invention consists in a method of pumping multi-phase fluid flow said arrangement comprising:

providing a centrifugal pump which includes a fluid inlet connected in fluid communication with a fluid source and an outlet through which said fluid is delivered,

10 providing a power providing means to rotate the impeller of said centrifugal pump

bleeding a portion of fluid from the outlet and delivering the bled fluid via a fluid connection providing means to said inlet to be injected into the main fluid flow into said centrifugal pump fluid,

15 wherein said centrifugal pump is provided with an impeller which has a plurality of vanes configured to define there between larger passageways when compared to a conventional centrifugal pump which would operate in or near optimum conditions when pumping liquid only.

20 Preferably said method further includes providing a flow control means in said fluid connection providing means to allow the rate of bled fluid flow to be controlled.

Preferably said method further includes the provision of a means to measure the volumetric rate and head of pressure of delivered fluid, the measurements taken to be utilised in setting of the flow control means.

25 Preferably said bleeding includes prior to the injection of said fluid, the splitting of fluid into at least two separated flow paths, wherein for each flow path there is an injection nozzle provided to inject the flow into the main suction flow to said centrifugal pump.

Preferably said injection of said bled fluid is in a manner which induces a rotation onto the main suction flow of fluid.

30 Preferably said rotation is in a direction co-rotatory with the direction of rotation of the impeller.

35 This invention may also be said broadly to consist in the parts, elements and features referred to or indicated in the specification of the application, individually or collectively, and any or all combinations of any two or more of said parts, elements or features, and where specific integers are mentioned herein which have known

- 5 -

equivalents in the art to which this invention relates, such known equivalents are deemed to be incorporated herein as if individually set forth.

The invention consists in the foregoing and also envisages constructions of which the following gives examples.

One preferred form of the present invention will now be described with reference to the accompanying drawings in which;

## DESCRIPTION OF THE DRAWINGS

**Figure 1** is a graph illustrating, as is commonly known, that when the gas contents of a fluid being pumped increase, there is a reduction in the head (H) and flow rate (Q) characteristics,

**Figure 2** is a schematic layout of an arrangement for pumping of multi-phase fluids utilising an injection,

**Figure 3** is a test rig layout diagram for the test conducted on the centrifugal pump to determine standard performance at 100% water flow to determine valves of flow characteristics including  $H_R$ , and for testing a multi-phase at various liquid/gas contents of the fluid being pumped,

**Figure 4** is a perspective of a nozzle unit with two nozzle points,

**Figure 5 and 6** are diagrams of impellers used in the testing of a pump,

**Figure 7** is a sectional view through inlet conduit to the centrifugal pump at the position where the four injector nozzles are placed,

**Figure 8** is a sectional view through the pumping arrangement at the centrifugal pump including an illustration of the bleed system and injection nozzle,

**Figure 9** illustrate the dimension of the pump with reference to the description,

**Figure 10** is a table illustrating results from the series of trials that were performed using the equipment and procedures as hereinafter described,

**Figure 11** shows a plot of head, power input, and pump efficiency verse flow rate Q, the tests being performed with a suction head of 550mm, an air pressure of 30psi (gauge), for a 3 vane impeller, the results of the 100% water, 100% air, and 90% air/water mix being plotted to illustrate the trends observed in the experiments,

**Figure 12** is a similar table to that shown in Figure 10, the results in this case being for a four vane impeller rather than a 3 vane impeller,

**Figure 13** shows a similar plot to Figure 11 where head, power input, and pump efficiency have been plotted against flow rate Q, once again the results from the 100% water, 100% air, and the 90% air/water mix being plotted to emphasize the trends observed in the experiments,

- 6 -

**Figure 14** is a table of data obtained from the experiments, the data relating to the pump suction void fraction  $\alpha_s$  for both a three and four vane impeller, the values obtained being gathered for a variety of ratios or normalised pump head, and

**Figure 15** is a plot of the data contained within the table of **Figure 14**, for use of a four vane impeller clearly being superior to that of a three vane impeller.

## DETAILED DESCRIPTION OF THE INVENTION

The pumping system according to the present invention includes a centrifugal pump 1 which has a suction side 16 and a delivery side 17.

The conduit or conduits connected to the delivery side of the pump are provided with a means to split 14 and separate (e.g. to bleed) some of the delivered fluid wherein one of the portions of split fluid is redirected via a fluid communication means 15 such as a conduit to deliver the split fluid to the inlet side or suction side of the pump. Preferably the delivery of split fluid back to the suction side of the pump is achieved by a nozzle unit positioned slightly upstream from the opening of the volute casing of the pump. The nozzle unit has preferably 4 nozzles and preferably injects the bled flow with a tangential component of velocity into the delivery conduit. This bleeding arrangement may be similar to that as described in our PCT application PCT/NZ99/00029. It has been found that by the inclusion of the bleeding system as for example described in our international PCT application PCT/NZ99/00029, (the contents of which is hereby to be read to be included in full in this specification), that difficulties as hereinbefore detailed, with multi-phase flow pumping are alleviated.

A control valve may also be placed in the bleed system to control the rate of flow which is directed to the nozzle unit(s) 1 on the suction conduit of the centrifugal pump. In overcoming the phenomena resultant from the gas content, it has been found in combination with the injected bled flow, that modification is required to the impeller of the standard centrifugal pumps. It is known that standard centrifugal pumps normally utilise approximately 7 or 8 impeller vanes for the pumping of liquids. It has been found that, to overcome the phenomena which normally cause the loss in head once the gas contents increases beyond a certain limit, an increase of volume of the passage ways between the vanes is required in order to avoid the formation of air pockets within the impeller passages.

With reference to the test results obtained from experimental tests which are hereinafter described, it has been found that a method of pumping multi-phase flow utilising a centrifugal pump has overcome or at least improved on the problems and limitations of the prior art.

- 7 -

In proving testing facilities for the present invention the suction pipe is modified to allow the introduction of air. A bleeding control system is placed on the discharge pipe with suitable nozzle unit(s) placed ahead of the pump impeller on the suction pipe. The pump is initially tested on water to establish a base performance level for comparison with the multi-phase performance. In this test, the pump is operated in the normal mode with water being drawn from the suction pit and discharged through a pressure control valve back to the pit. The capacity is measured at various discharge pressures to obtain the characteristic performance on water. A series of tests is then to be conducted with increasing amounts of air being drawn into the inlet pipe. The air flow rate is measured with a variable area flow meter adjusted to the pump inlet pressure.

With the arrangement of bleeding as broadly described in our PCT specification PCT/NZ99/00029 and that shown in the drawings of the present specification, and correct impeller design, a radical solution is offered to handle a multi-phase flow, for pumping multi-phase flow with gas/steam content variable over a large range between zero percent to 100 percent in for example oil/geothermal production industry. During pumping of multi-phase fluids gas starts to accumulate at the start of the pump and this results in a pocketing of the fluid. It is much like when certain pumps require priming to remove any air from the system prior to the pump operating efficiently. It is suggested by the inventor that with larger passages in conjunction with upstream flow modification by injection of fluid into the intake conduit, has improved the efficiency and effectiveness of centrifugal pumps, to handle multi-phase fluids.

The present invention proposes to compensate the increase power requirement by removing vanes from a standard impeller of a standard centrifugal pump (standard in respect of it normally pumping at or near optimum, a fluid which is 100 percent liquid) the removal of such vanes increasing the passage way size. Such increase in passage way size does increase the mass which is being drawn through the impeller and the increase in power it is suggested is compensated at least in part by providing an upstream rotation (preferably co-rotating) of fluid by the injection of fluid into the intake conduit. Such rotation is not aimed at separating the phases of flow but merely to provide an increase in the energy (in large by the velocity head increase) of the intake flow in combination with improved flow directions.

The problem with existing attempts at pumping multi-phase flow also is with respect to sonic problems. Sonic boom type problems occur if the relative velocity of the flow and the vanes is such as to create (dependent on the state of the fluid) subsonic problems. It is suggested by the inventor that to ensure that the speed of sound is not

- 8 -

exceeded by the vanes there is an induced flow provided to the intake fluid in such a manner to reduce this possibility. This is achieved by the injection as suggested which aids in providing a modification of the state of the intake fluid (i.e. pressure) to furthermore reduce such an occurrence of sonic boom. By way of example, reference is now made to experimental trails which support the improvements provided by the present invention.

### **Example**

The following is a description of details of experiments conducted on a centrifugal pump. The pump was tested in two modes, a first, normalising mode where the fluid being pumped was 100% water and a second mode at various degrees of air void fraction. This was repeated for two different impeller configurations, a first 4 blade impeller and a second 3 blade impeller.

### **The setup**

The centrifugal pump used was operating with low head of 2 meters. The specifications of the pump are as follows

<b>Item</b>	
Pump size	190 x 160 x100
Pump type	Vertical Centrifugal Single suction Single discharge
Nozzle units	4 x 12 mm d <sub>B</sub>
Number of blades	3 and 4
Impeller diameter	50 mm
Inlet blade angle (degrees)	79/72 degrees
Outlet blade angle (degrees)	42/47 degrees
Rated head	2 m (6.56 ft)
Rated flow	0.8 l/s (12.7 gpm)

- 9 -

Specific speed 2,431  
(dimensionless)  
Suction specific 6,874  
speed)  
(dimensionless)

Motor power 0.25  
(kW)  
Motor (rpm) 2,800

The test pump has modified centrifugal impellers (3 vanes and 4 vanes) and a single discharge volute. There is a conical diffuser at the higher-pressure end of the pump. The pump has the following dimensions with reference to figure 9.  $r_1 = 10$  mm,  $r_2 = 25$  mm  $b_1 = 12$  mm,  $b_2 = 8$  mm,

Figures 3 shows the two test circuits used. Figure 3 shows the base performance testing which can be switched to the multi-phase flow testing circuit by closing the main line valve 12 and opening the water line valve 13 to redirect flow.

A venturi-meter for the base performance test is placed in the suction line (main line) to measure the volume of discharged water per unit time.

The water flow meter 6 (to measure volumetric flow rate) is connected to an auxiliary pump having similar characteristics as that of the tested pump. The air flow meter 5 (to measure volumetric flow rate) is connected to a regulator and a compressor having the following characteristics:

- Working pressure = 8 bars
- Motor speed = 2910 / 2860 rpm, 240 volts, 8.8 amperes, 50 Hz

Gauge manometers were used to measure the pressure head at the suction and delivery sides.

Tests were performed with a 3 blade and 4 blade impeller of which the details were as follows.

The blade inlet angles were as follows:

Three blade impeller = 79 degrees

Four blade impeller = 72 degrees

and the vane lengths are:

Three blade impeller = 15 mm

Four blade impeller = 15 mm

Tests were was run at impeller speed of  $n = 2800$  rpm

The nominal flow rate was:



- 10 -

$$Q_n = 0.8 \text{ L/S (discharge flow rate)}$$

and the corresponding head was:

$$H_n = 2 \text{ m}$$

5 The pumps Reynolds number ( $Re$ ) was found to be in the range of  $Re = Vd/\nu = 10^5$  at the inlet to the impeller.

Tests were conducted using the controlled bleeding arrangement, transferring a portion of the pressure energy in the discharge line, back to the suction side. A nozzle unit was placed near the impeller entrance.

10 The function of the nozzle unit is a supplier of pressure energy and imparts the particles of the fluid with tangential acceleration preferably in the direction of rotation of the impeller.

The following table and figure 4 gives the geometric dimensions of the nozzle unit used

Item	
Number of nozzles (Z)	4
Bleeding pipe diameter to nozzle ( $d_B$ )mm	12
Nozzle-head diameter ( $d_N$ )mm	6
Length of taper (L) mm	24
Distance from impeller entrance(mm)	65

25 The test loops were fully instrumented to measure the flow conditions at the suction and discharge of the pump. It was also possible to monitor all the important parameters under two phase flow conditions. They included the flow rate ( $Q$ ), pump head ( $H$ ), motor power (BHP), void fraction ( $\alpha_s$ ), as well as pressures and temperatures around the loops. The suction void fraction was measured using water/air flow-meters.

30 The suction piping was modified to allow the introduction of air into the pipe and also injection of amounts of water.

### The procedure

35 Tested were first conducted with 100% water to establish a base performance for comparison with the multi-phase performance. In the tests the pump was operated

on levels of delivery head of 550 mm measured relative to the centre-line of the suction pipe.

The water drawn from the tank passes through a venturi-meter on the suction line, the tested pump, and finally discharges through a pressure control valve back to the tank via a separator. The capacity was measured at various discharge pressures to obtain the characteristic performance with water.

A series of tests was then conducted with increasing amount of air in the flow in accordance with the second test loop shown in Figure 3.

The airflow rate was measured using an air flow meter and adjusted to the pump inlet pressure.

The two-phase pump head data, the water density  $\rho_L$  and air density  $\rho_g$  were computed at normal pump conditions. The two phase mixture density at the suction of the pump can be obtained from the following equation

$$\rho_{2\phi} = \rho_g \alpha + (1 - \alpha) \rho_L$$

The two-phase pump head is calculated as the ratio of the static pressure difference across the pump to the two-phase mixture density obtained from equation

$$H_T = (P_2 - P_1) / \rho_{2\phi}$$

Normalised pump head is defined as the ratio of the pump head to the rated head,  $H_R$ . In the present study, in order to have a better comparison between the model predictions and the experimental data, the normalised head is defined as the ratio of the two-phase pump head,  $H_T$ , to the single-phase head,  $H_S$ , at the same suction pressure.

## The results

The data for the various fluid mixture for both a three vane and four vane configuration are shown in the tables of Figures 10 and 12 respectively. This data is plotted and shown in figures 11 and 13 as pressure/flow rate curves and compared against the pump pressure/flow rate performance with 100% water with the same injection setup parameters.

The air/water tests for the pump was reduced from pressure to meters of head so they could be compared with the pump tests running on water only.

The tests for air/water volumes was conducted at 30 psig.

Figures 11 and 13 show the characteristic curves for the pump at 90 – 100% air/water mixture.

The operation of the two pumps as set in these tests showed no surging for the range between 0 – 100% volume percent air. The operations were steady without head oscillations at any stage of the tested air volume. It was noticed that the pressure head values are higher with higher intake air pressures. Therefore, the air/water mixture through the pump can approach the performance of a centrifugal pump running on water.

Figure 15 shows the normalised pump head ( $H_{2\phi}/H_R$ ) with suction void fraction ( $\alpha_s$ ). The test results showed no evidence of head degradation at any volume ratio of air/water mixture. Where no injection of bled fluid is provided it is expected that the loss in performance can be expected to occur well before the proportion of air is significant. Such drop in performance may occur at void fractions between 4 and 6.

When the local void increases, the gas velocity has to decrease and the liquid phase will then accelerate in order to maintain the total mass flow rate as a constant. The acceleration of the liquid phase within the pump impeller channels is the major mechanism responsible for the two-phase pump head degradation. It seems that the viscous forces would play a significant role in determining the final shape of these curves, as a larger value of dynamic viscosity is found in voids having more water volume than air, and the same value becomes less with increasing volume of air.

Although multi-phase products have been pumped for many years with two screw type pumps, centrifugal impeller pumps showed serious departure from published performance curves. The bands of calculated head, shown when surging begins, indicate the head oscillated from high to low values once the percent by volume of gas exceeds some point between seven percent and eleven percent by volume at intake. The test of the present invention have shown the ability of the modified centrifugal pump, with the upstream injection of bled fluid to increase the velocity head of intake fluid, to handle multi-phase products with high air void fractions.

The modification in centrifugal impeller by the reduction of the number of impeller blades and the use of an injection nozzle unit prior to entry to the pump showed a marked improvement over a large range of void fractions in the pumping ability of the centrifugal pump. With comparison between the results from the 4 vane and 3 vane charts, it can be seen that better results were obtained from the 4 bladed

impeller.

### Nomenclature

	$d_B$	: Bleeding pipe diameter to nozzle
5	$d_N$	: Nozzle head diameter
	$g$	: Gravity
	$H_n$	: Nominal head
	BHP	: Horse power
	$H_{2\phi}$	: Two-phase pump head
10	$H_R$	: Rated head
	$L$	: Taper length of nozzle
	$n_s$	: Specific speed
	$P$	: Pressure
	$Q_n$	: Nominal flow rate
15	$\alpha$	: Void fraction
	$\alpha_s$	: Suction void fraction
	$\rho$	: Density
	$\Delta\rho = \rho_L - \rho_g$	: Density difference
	$\rho_g - \rho_L$	: Phase density
20	$Z$	: Number of blades

**CLAIMS**

1. A pumping arrangement for pumping multi-phase fluid flow said arrangement comprising:

5 a centrifugal pump which includes a fluid inlet and an outlet and driveable by a power providing means,

10 a fluid communication providing means to provide a communication of fluid between said outlet and said inlet of said pump, said fluid communication being such as to provide a fluid connection between said outlet and said inlet to deliver fluid of a higher pressure from said outlet to said inlet when said centrifugal pump is in operation,

wherein said centrifugal pump is provided with an impeller which has a plurality of vanes configured to define there between larger passageways when compared to a conventional centrifugal pump which would operate in or near optimum conditions when pumping liquid only.

15 2. A Pumping arrangement as claimed in claim 1 wherein said arrangement is for pumping a fluid of a gaseous/liquid mix.

3. A Pumping arrangement as claimed in claims 1 or 2 wherein said power providing means is an electric motor.

20 4. A Pumping arrangement as claimed in any one of claims 1 to 3 wherein said fluid connection is a bleed line to bleed a portion of said fluid from the outlet of said centrifugal pump to the inlet.

25 5. A Pumping arrangement as claimed in any one of claims 1 to 4 wherein said fluid connection between said outlet and inlet of said centrifugal pump is provided with at least one nozzle at the inlet for injection of bled fluid into the delivery line of said inlet of said centrifugal pump.

6. A Pumping arrangement as claimed in claim 5 wherein said at least one nozzle provides, an increase in velocity head to said bled flow prior to the point of injection by reducing the flow area of the fluid connection means

30 7. A Pumping arrangement as claimed in claims 5 or 6 wherein said at least one nozzle is oriented in respect of the delivery line of the inlet so as to impart a pre-rotation force onto the main inlet side fluid delivery.

8. A Pumping arrangement as claimed in claim 7 wherein said pre-rotation is in a direction co-rotatory with said impeller rotation direction.

- 15 -

9. A Pumping arrangement as claimed in any one of claims 1 to 8 wherein said impeller is not of a substantially greater diameter than said conventional pump.

10. A Pumping arrangement as claimed in any one of claims 1 to 9 wherein the impeller is one modified from a one of a centrifugal pump which would be ordinarily (to operate at or about peak efficiency) designated to pump in a similar situation to the pump of the present invention but where the fluid is liquid only, said modification including the removal of vanes to provide said larger passageways, but to a limit of no less than 2 vanes remaining present.

11. A Pumping arrangement as claimed in any one of claims 1 to 10 wherein said impeller has between 2 and 4 vanes.

12. A Pumping arrangement as claimed in any one of claims 1 to 11 wherein said impeller has 4 vanes.

13. A method of pumping multi-phase fluid flow said arrangement comprising:  
providing a centrifugal pump which includes a fluid inlet connected in fluid communication with a fluid source and an outlet through which said fluid is delivered,  
providing a power providing means to rotate the impeller of said centrifugal pump

bleeding a portion of fluid from the outlet and delivering the bled fluid via a fluid connection providing means to said inlet to be injected into the main fluid flow into said centrifugal pump fluid,

wherein said centrifugal pump is provided with an impeller which has a plurality of vanes configured to define there between larger passageways when compared to a conventional centrifugal pump which would operate in or near optimum conditions when pumping liquid only.

14. A method of pumping as claimed in claim 13 wherein said method further includes providing a flow control means in said fluid connection providing means to allow the rate of bled fluid flow to be controlled.

15. A method of pumping as claimed in claims 13 or 14 wherein said method further includes the provision of a means to measure the volumetric rate and head of pressure of delivered fluid, the measurements taken to be utilised in setting of the flow control means.


16. A method of pumping as claimed in any one of claims 13 to 15 wherein said bleeding includes prior to the injection of said fluid, the splitting of fluid into at least

- 16 -

two separated flow paths, wherein for each flow path there is an injection nozzle provided to inject the flow into the main suction flow to said centrifugal pump.

17. A method of pumping as claimed in any one of claims 13 to 16 wherein said injection of said bled fluid is in a manner which induces a rotation onto the main suction flow of fluid.

18. A method of pumping as claimed in claim 17 wherein said rotation is in a direction co-rotatory with the direction of rotation of the impeller.

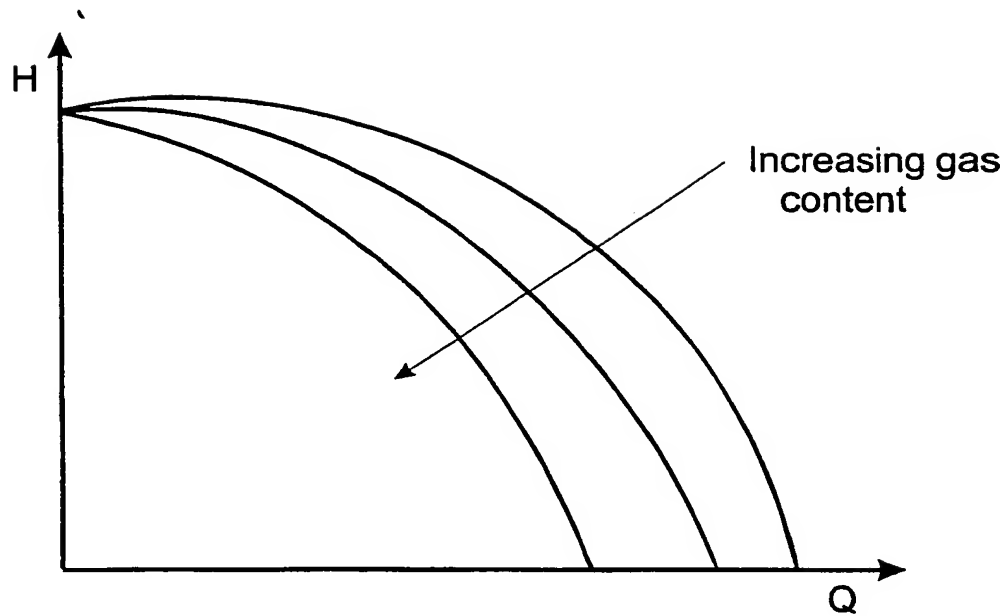**FIGURE 1**



2/10

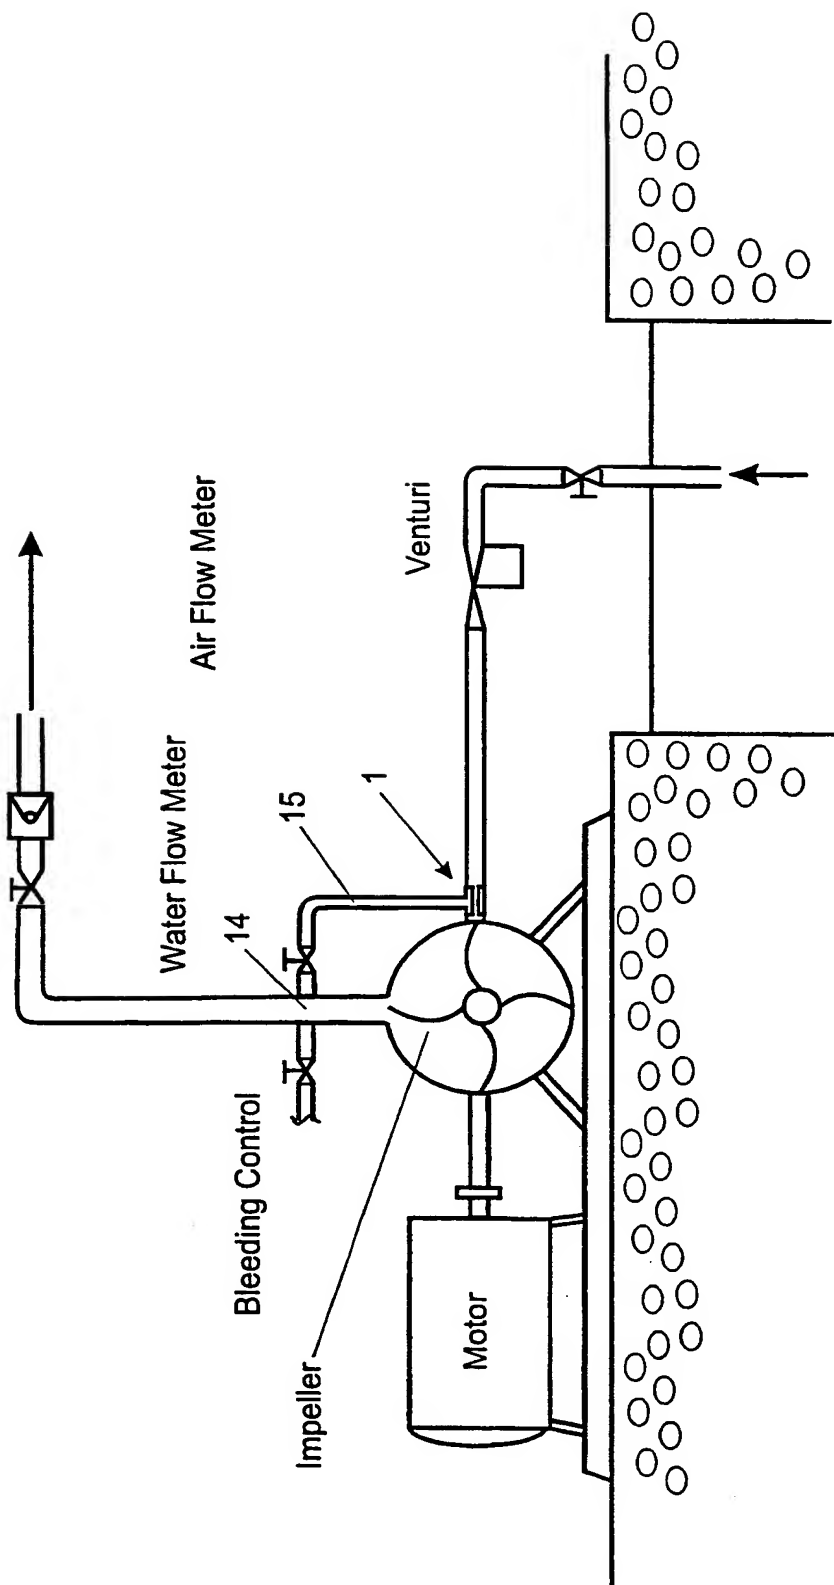


FIGURE 2

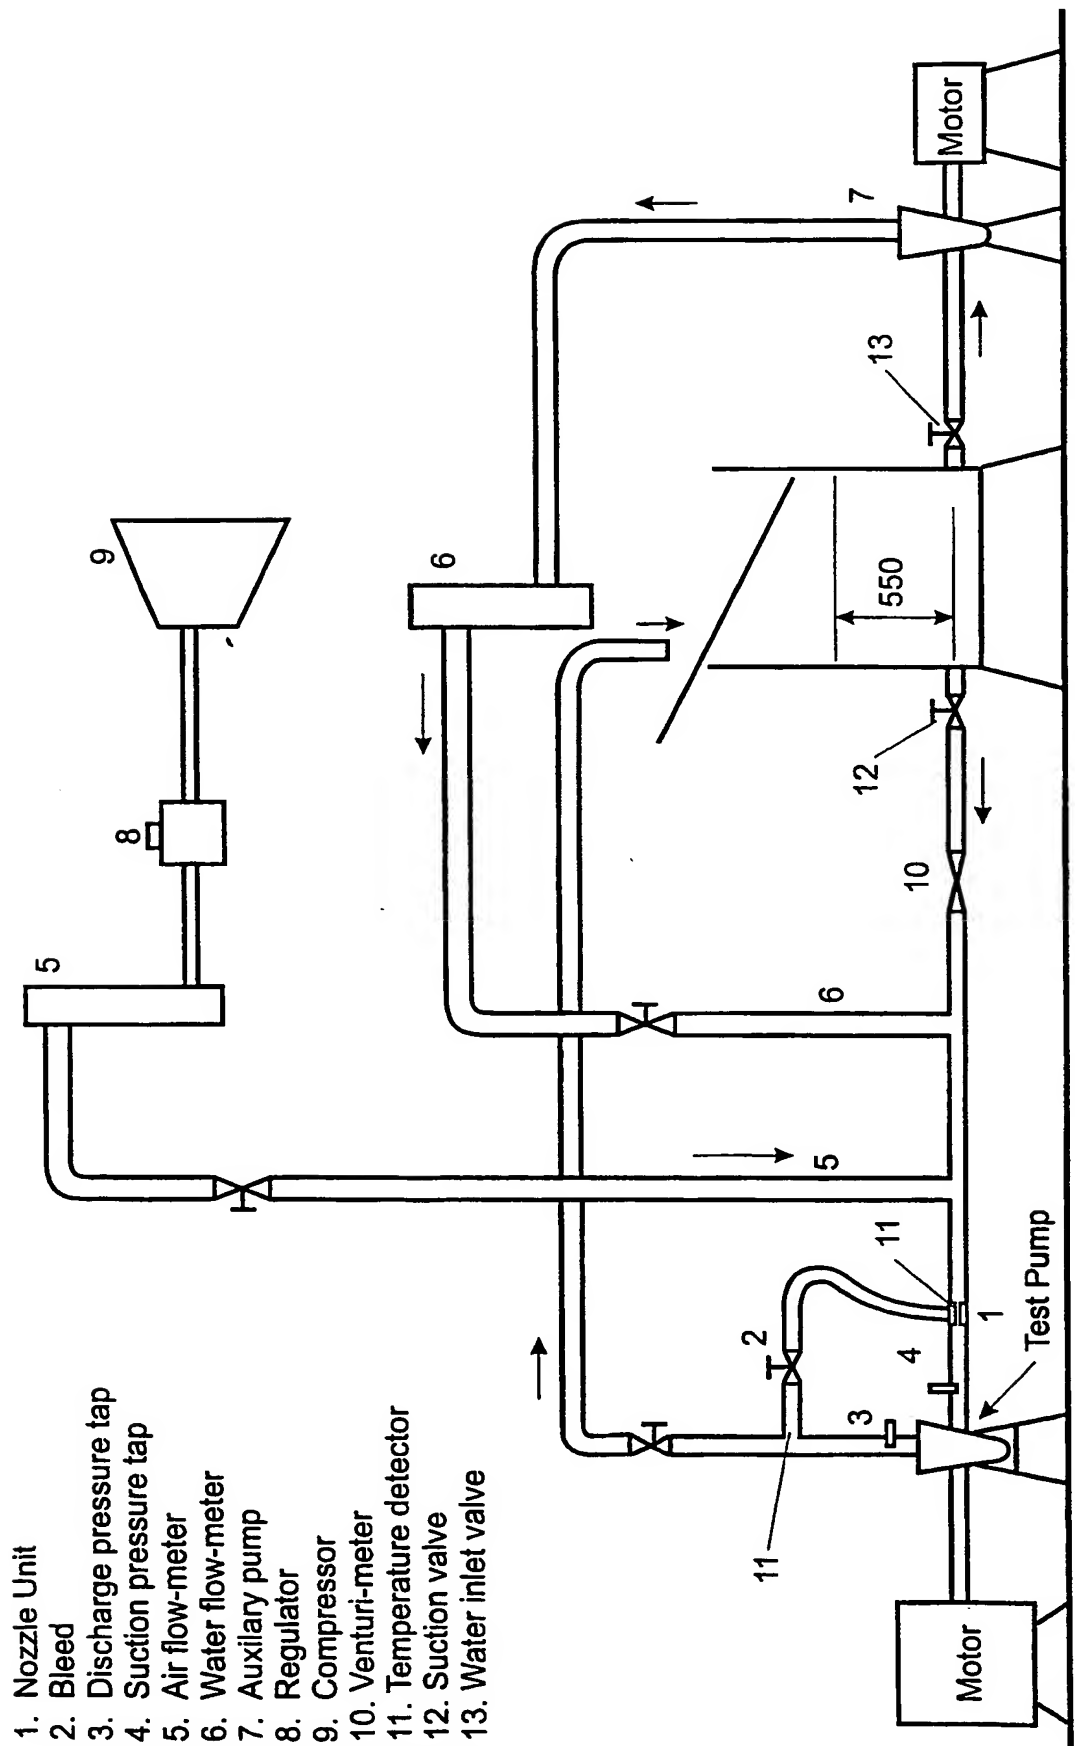


FIGURE 3

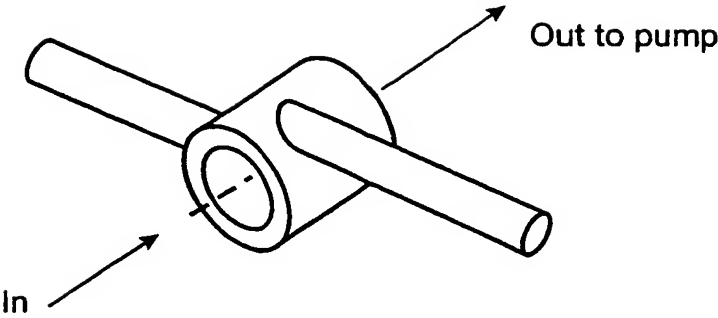


FIGURE 4

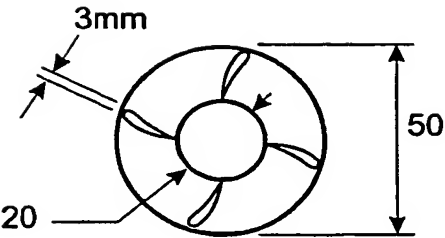


FIGURE 5




FIGURE 6

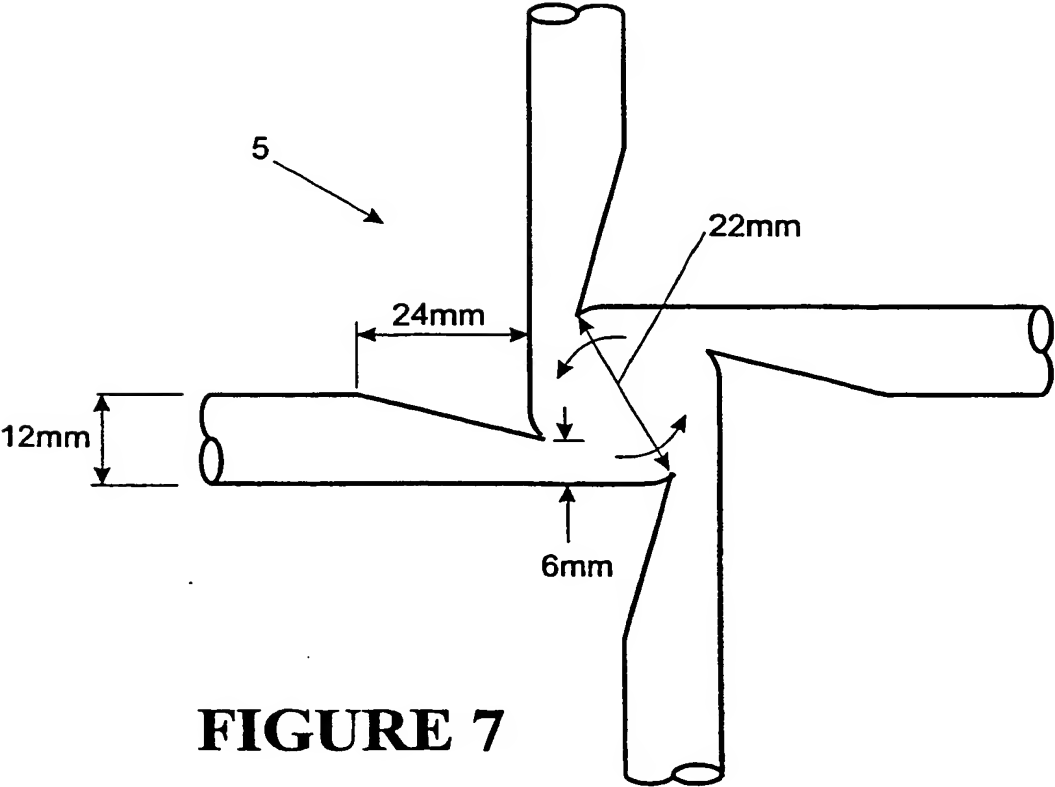
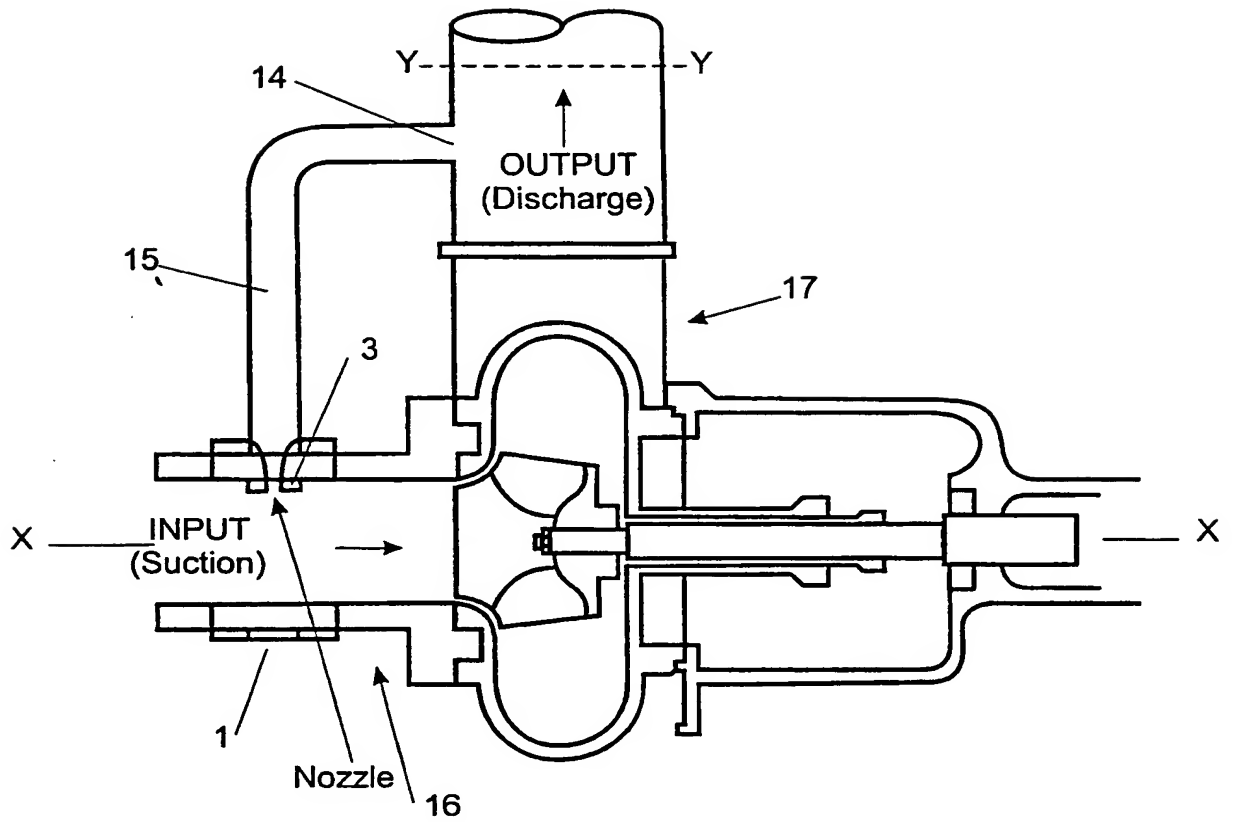
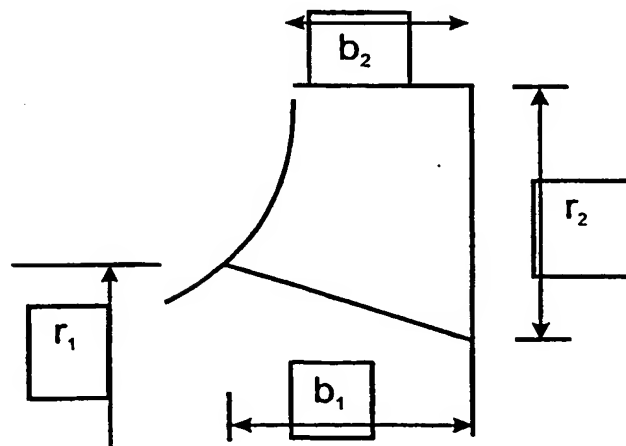


FIGURE 7

5/10

**FIGURE 8****FIGURE 9**

100% Water		3 Vane Impeller: Air/Water Mixture - Intake air pressure 30psig																										
		10%					20%					30%					40%					50%						
		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)			
Q(L/s)	1	0.9	0.84	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0
H(m)		1.9	2.3	2.5	3.6	2.3	2.6	2.9	3.1	2.2	2.5	2.8	3.2	2.1	2.5	2.6	3.1	2	2.4	2.7	3.1	1.8	2.5	2.6	3			
$\eta_o$ (%)		75	82	83	0	75	43	24	0	72	40	23	0	69	40	23	0	65	39	22	0	59	40	22	0			
Bhp (kW)		0.18	0.2	0.2	0	0.18	0.1	0.06	0	0.18	0.1	0.06	0	0.17	0.1	0.06	0	0.16	0.1	0.05	0	0.14	0.1	0.05	0			

100% Water		3 Vane Impeller: Air/Water Mixture - Intake air pressure 30psig																								
		60%					70%					80%					90%					100%				
		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)		Q(L/s)	H(m)	$\eta_o$ (%)	Bhp (kW)	
Q(L/s)		0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	
H(m)		2	2.4	2.7	3	1.9	2.3	2.5	2.9	1.9	2.3	2.5	2.7	1.85	2.3	2.4	2.7	1.9	2.3	2.4	2.7	1.9	2.3	2.4	2.8	
$\eta_o$ (%)		65	39	22	0	62	37	21	0	62	37	21	0	61	37	20	0	62	37	20	0	62	37	20	0	
Bhp (kW)		0.16	0.09	0.05	0	0.15	0.09	0.05	0	0.15	0.09	0.05	0	0.15	0.09	0.05	0	0.15	0.09	0.05	0	0.15	0.09	0.05	0	

## FIGURE 10

7/10

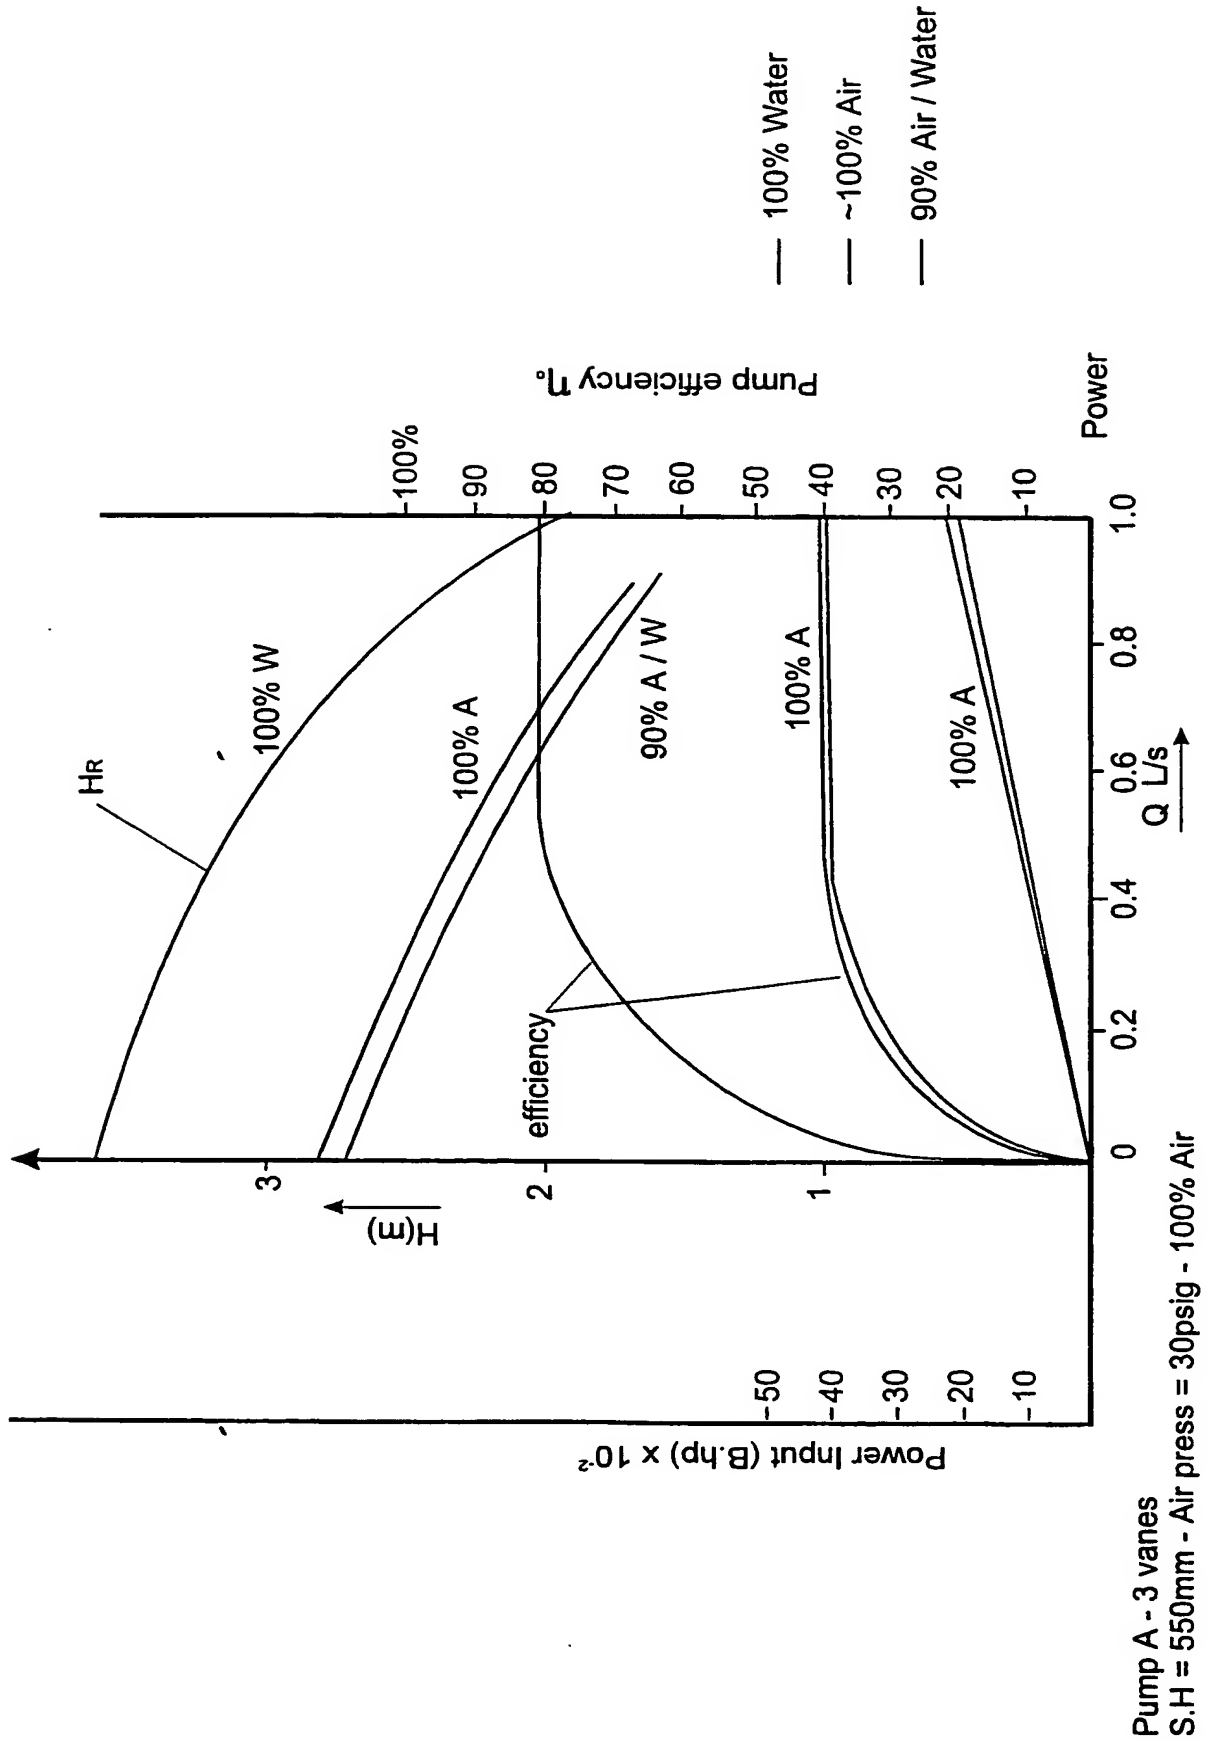


FIGURE 11

8/10

100% Water		4 Vane Impeller: Air/Water Mixture - Intake air pressure 30psig														
		10%			20%			30%			40%			50%		
Q(L/s)	1	0.98	0.92	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0
H(m)	1.6	1.78	2.1	3.34	2.1	2.2	2.9	3	2.2	2.4	2.9	3.1	2.1	2.3	2.8	3.1
$\eta_o$ (%)	63	63	76	0	69	36	24	0	72	39	24	0	69	37	23	0
Bhp (kW)	0.15	0.15	0.18	0	1.7	0.09	0.06	0	0.18	0.09	0.06	0	0.17	0.09	0.06	0

		4 Vane Impeller: Air/Water Mixture - Intake air pressure 30psig														
		60%			70%			80%			90%			100%		
Q(L/s)		0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21	0	0.83	0.41	0.21
H(m)		2	2.3	2.7	3.2	1.9	2.3	2.7	2.9	1.95	2.3	2.8	3	1.9	2.5	3
$\eta_o$ (%)		65	37	22	0	62	37	22	0	64	37	23	0	62	40	25
Bhp (kW)		0.16	0.09	0.05	0	0.15	0.09	0.05	0	0.16	0.09	0.06	0	0.15	0.1	0.06

FIGURE 12

9/10

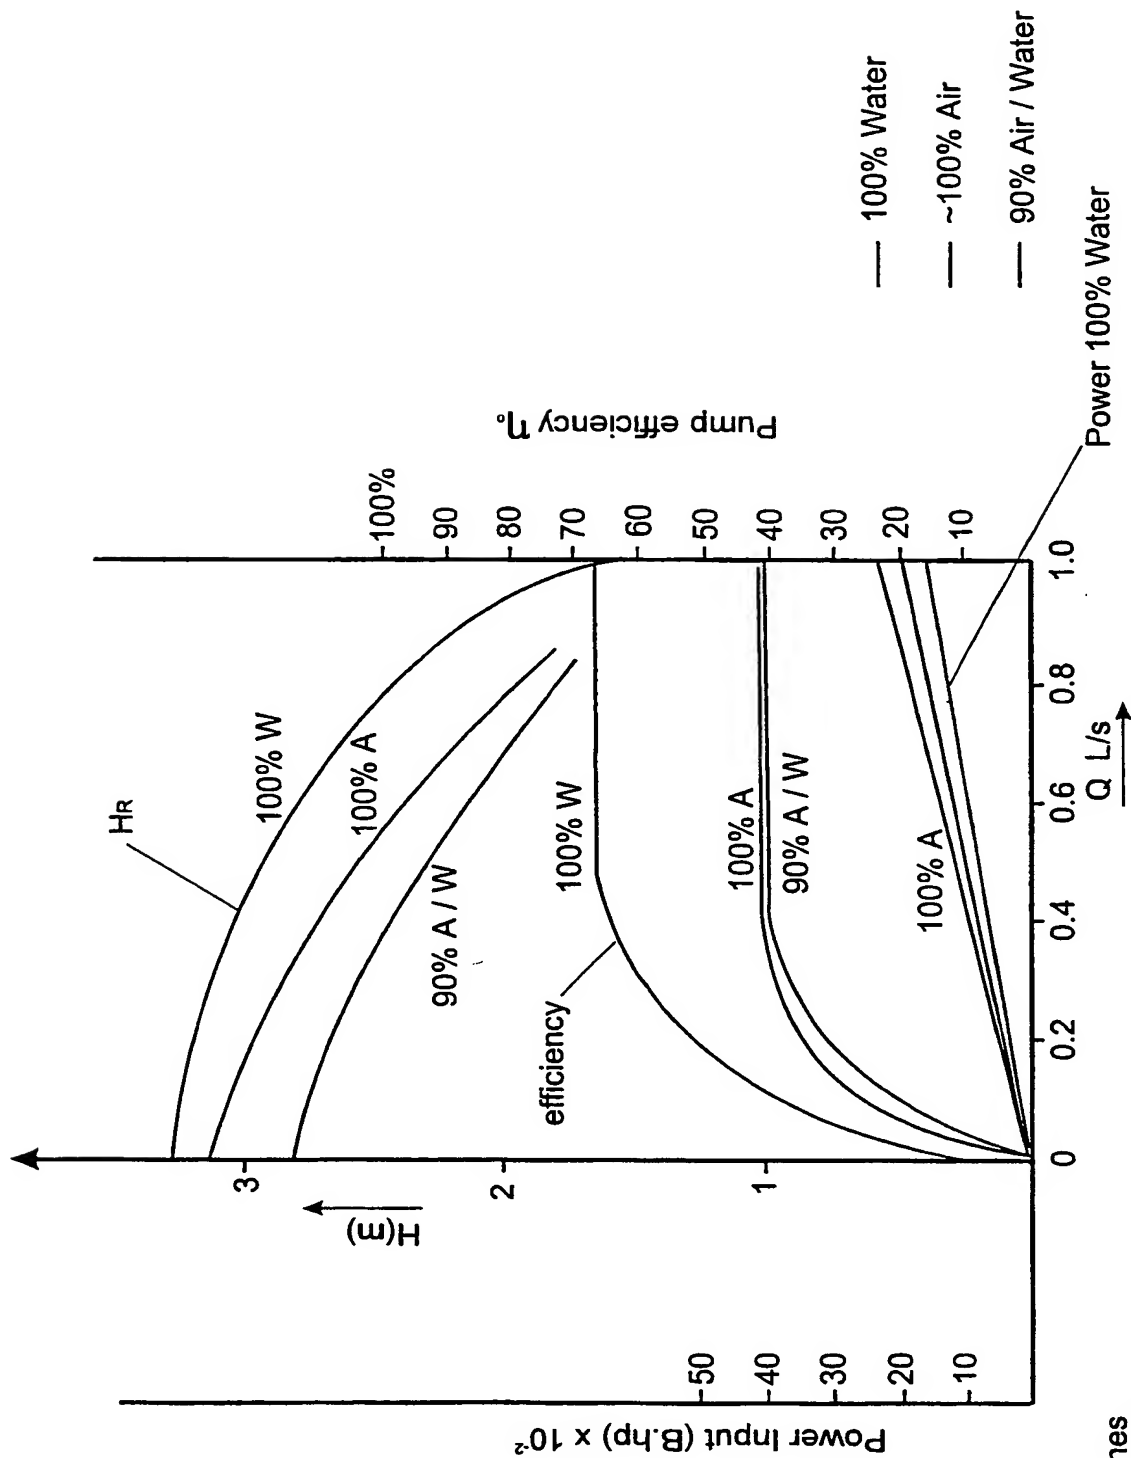


FIGURE 13

Pump A - 4 vanes  
S.H = 550mm - Airpress = 30psig



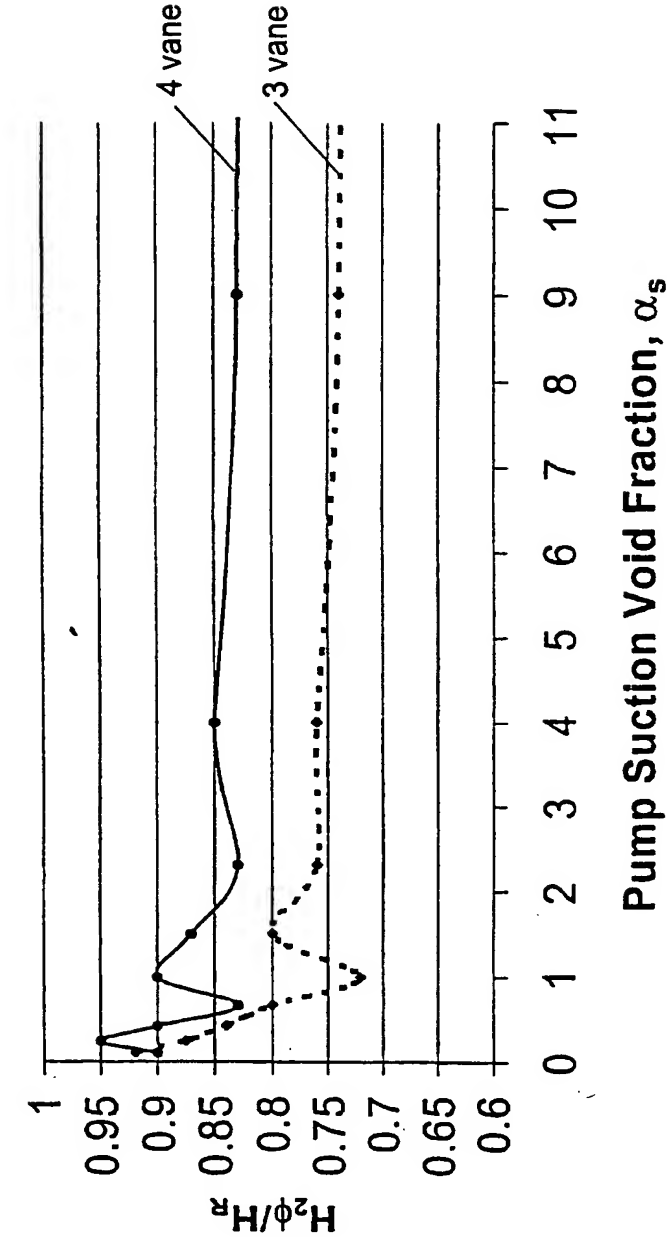


FIGURE 15

$H_2\phi/H_r$	4- vane	3- vane
0.11	0.9	0.92
0.25	0.95	0.88
0.43	0.9	0.84
0.67	0.83	0.8
1	0.9	0.72
1.5	0.87	0.8
2.3	0.83	0.76
4	0.85	0.76
9	0.83	0.74
50	0.83	0.72

FIGURE 14

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/NZ00/00134

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>				
Int. Cl. <sup>7</sup> : F04D 7/04, 29/22				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b>				
Minimum documentation searched (classification system followed by classification symbols) IPC : F04D 7/04, 29/22				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC AS ABOVE				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI, USPTO				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y	EP 702156A1 (INSTITUT FRANCAIS DU PETROLE) 20 March 1996 See the whole document	1-18		
Y	EP 760427A1 (GIW INDUSTRIES INC.) 5 March 1997 - See the whole document	1-18		
P,Y	WO 99/46513A1 (UNITEC INSTITUTE OF TECHNOLOGY) - 16 September 1999 See the whole document	1-18		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input type="checkbox"/> See patent family annex				
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td style="vertical-align: top;"> <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" Earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> </td> </tr> </table>			<p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" Earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
<p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" Earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>			
Date of the actual completion of the international search 11 September 2000		Date of mailing of the international search report 15 SEP 2000		
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  ASANKA PERERA Telephone No : (02) 6283 2373		

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ00/00134

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2058218A (KLEIN, SCHANZLIN & BECKER AKTIENGESELLSCHAFT) 8 April 1981 See the whole document	1-18
A	GB 2168764A (ROLLS-ROYCE LIMITED) 25 June 1986 See the whole document	1-18
A	GB 2193533A(NUOVOPIGNONE-INDUSTRIE MECCANICHE E FONDERIA S.p.A.) 10 February 1988 See the whole document	1-18
Note: With regard to the "Y" category documents, either EP 702156A1 or WO 99/46513A1 when combined with EP 760427A1, anticipate claims 1-18.		

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/NZ00/00134**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
EP	702156	FR	2724424	NO	953595	US	6007306
EP	760427	US	5813833	US	6053698	EP	984166
WO	99/46513	AU	31761/99				
GB	2058218	BR	8005407	FR	2464390		
GB	2168764	DE	3544566	FR	2575235	JP	61210298
GB	2193533	CA	1274722	FR	2602552	GB	2193533
		IT	1198017	NL	8701840	NO	873253
		SE	8703031	US	4778341		
							END OF ANNEX